



CS 50/25 PRIME M

Cod. PR-CS300-040-M

Oil free reciprocating air compressors with soundproof cabinet, 3 cylinders, with a compressed air FAD of 225 l/min @ 5 bar pressure. Receiver capacity 40 L, with internal surface treatment to protect against corrosion. Complete with membrane dryer to ensure maximum air purity. This compressor is available also in **10 BAR VERSION**, visit the appropriate section!


Maximum simultaneous use: 3

Dental Chairs: 4



Cod.	Air Dryer	Air capacity	FAD Fad @ 5bar	Motor	Voltage Hz	Receiver	Noise Level	RPM	Duty Cycle	max P.	Size	net Weight
CS 50/25 PRIME M PR-CS300-040-M	Yes	cfm 12.71	cfm 7.94	HP 2.9	230V 50Hz	GAL 10.57	db(A) 53	1350	70 %	PSI 102	inch 20.9x29.5x36	Lb 233.7
CS 50/25 PRIME M PR-CS300-040-M-400	Yes	cfm 12.71	cfm 7.94	HP 2.9	400V 50Hz	GAL 10.57	db(A) 53	1470	70 %	PSI 102	inch 28.3x19.3x35	Lb 233.7
CS 50/25 PRIME M 220V - 60Hz PR-CS300-040-M-6	Yes	cfm 14.83	cfm 8.58	HP 2.9	220V 60Hz	GAL 10.57	db(A) 53	1800	70 %	PSI 102	inch 28.3x19.3x35	Lb 242.6
CS 50/25 PRIME M 220V - 60Hz UL PR-CS300-040-M-6-UL	Yes	cfm 14.83	cfm 8.58	HP 2.9	220V 60Hz	GAL 10.57	db(A) 53	1800	70 %	PSI 102	inch 28.3x19.3x35	Lb 242.6

Air delivery performance

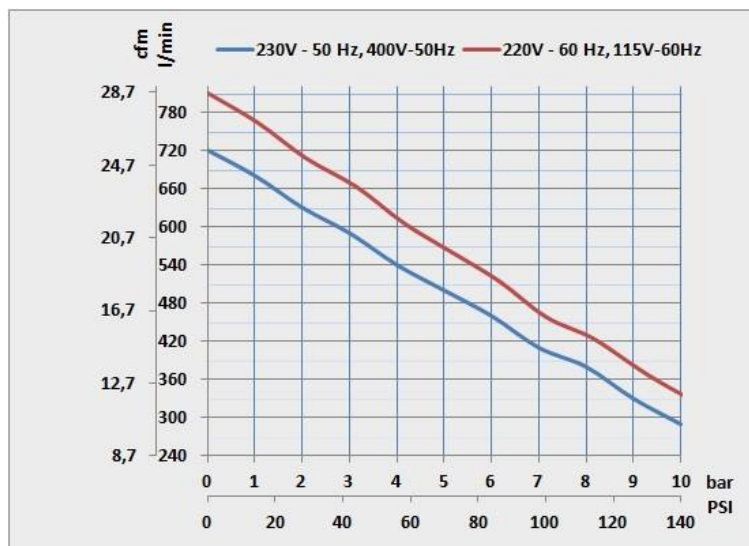

Maintenance kits

Kit.	Description	Type	Hours
TA-FL-026-K-SCP	<p>PRIME 2-3 M filter cartridges kit</p> <p>Cartridge replacement kit for ordinary maintenance of the PURE AIR PRIME 2.3 M range.</p> <p>Comprehends:</p> <ul style="list-style-type: none"> • 3 suction filters, code: TA-FL-058-C • 1 5 micron filter cartridge, code: TA-FL-001-C-5M • 1 0.01 micron filter cartridge, code: TA-FL-024-C2-5M • 2 o-rings for filters, cod. TA-FL-001-OR • 1 non-return valve pads, code: CO-PV-001 • 1 5 micron filter cartridge (AF30), code: TA-FL-075-C • 1 0.01 micron filter cartridge (AFD30), code: TA-FL-076-C • 2 o-rings for filters, cod. TA-FL-075-OR • 1 AMG150 water separator filter cartridge, code: TA-FL-074-C <p>Replace the filtration cartridges every 2 years.</p>	Ordinary	1.000h/1y
PR-GC-032-K-SCP	<p>PRIME 3</p> <p>Extraordinary maintenance spare parts kit for PRIME 2.2 kW (PRIME 3) versions.</p> <p>comprehends:</p> <ul style="list-style-type: none"> • 3 suction filters, code: TA-FL-058-C • 6 O-rings, code: MA-PC018 • 3 piston rings , code: MA-MG00001 • 3 piston guide rings, code: MA-MG00003 • 3 expansion rings for the segments, code: MA-MG00024 • 3 complete valve plates, code: MA-MG-02002P-C-P • 1 non-return valve pads, code: CO-PV-001 <p>The recommended maintenance intervals for this compressor are 4000 hours/4 years.</p>	Extraordinary	4.000h/4y

Contacts:
Werther Air Compressors
 5250 North Sam Houston
 Parkway W. Suite 850
 Houston, TX 77086
 Phone: 832-327-7452
 E-Mail: sales@werther.com
 Web: www.werther.com