



50/15 PRIME M

Cod. PR-OF200-040-M

Oil free reciprocating air compressors, 2 cylinders, with a compressed air FAD of 152 l/min @ 5 bar pressure. Receiver capacity 40 L, with internal surface treatment to protect against corrosion. Complete with membrane dryer to ensure maximum air purity. This compressor is available also in **10 BAR VERSION**, visit the appropriate section!

UL version for the USA market is also equipped with ASME certified air receiver

Maximum simultaneous use: 2


Dental Chairs: 3

Medical Device CE 0425



Cod.	Air Dryer	Air capacity	FAD Fad @ 5bar	Motor	Voltage Hz	Receiver	Noise Level	RPM	Duty Cycle	max P.	Size	net Weight
50/15 PRIME M PR-OF200-040-M	Yes	cfm 8.47	cfm 5.37	HP 2	230V 50Hz	GAL 10.57	db(A) 66	1360	70 %	PSI 102	inch 28x16.1x30.3	Lb 110.3
50/15 PRIME M PR-OF200-040-M-400	Yes	cfm 9	cfm 5.37	HP 2	400V 50Hz	GAL 10.57	db(A) 66	1470	70 %	PSI 102	inch 28x16.1x30.3	Lb 110.3
50/15 PRIME M 220V - 60Hz PR-OF200-040-M-6-UL	Yes	cfm 9.88	cfm 5.82	HP 2	220V 60Hz	GAL 10.57	db(A) 66	1760	70 %	PSI 102	inch 28x16.1x30.3	Lb 110.3
50/15 PRIME M 110 PR-OF200-040-M-110	Yes	cfm 9.88	cfm 5.82	HP 2	110V 60Hz	GAL 10.57	db(A) 66	1760	70 %	PSI 102	inch 28x16.1x30.3	Lb 110.3

Air delivery performance

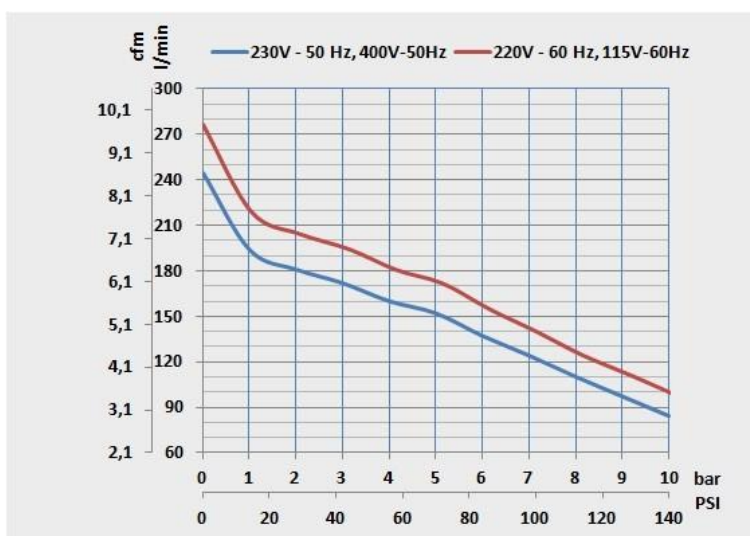

Maintenance kits

Kit.	Description	Type	Hours
TA-FL-026-K-SCP	<p>PRIME 2-3 M filter cartridges kit</p> <p>Cartridge replacement kit for ordinary maintenance of the PURE AIR PRIME 2.3 M range.</p> <p>Comprehends:</p> <ul style="list-style-type: none"> • 3 suction filters, code: TA-FL-058-C • 1 5 micron filter cartridge, code: TA-FL-001-C-5M • 1 0.01 micron filter cartridge, code: TA-FL-024-C2-5M • 2 o-rings for filters, cod. TA-FL-001-OR • 1 non-return valve pads, code: CO-PV-001 • 1 5 micron filter cartridge (AF30), code: TA-FL-075-C • 1 0.01 micron filter cartridge (AFD30), code: TA-FL-076-C • 2 o-rings for filters, cod. TA-FL-075-OR • 1 AMG150 water separator filter cartridge, code: TA-FL-074-C <p>Replace the filtration cartridges every 2 years.</p>	Ordinary	1.500h/2y
PR-GC-031-K-SCP	<p>PRIME 2</p> <p>Extraordinary maintenance spare parts kit PRIME 1.5 kW (PRIME 2) versions.</p> <p>comprehends:</p> <ul style="list-style-type: none"> • 2 suction filters, code: TA-FL-058-C • 4 O-rings, code: MA-PC018 • 2 piston rings , code: MA-MG00001 • 2 piston guide rings, code: MA-MG00003 • 2 expansion rings for the segments, code: MA-MG00024 • 2 complete valve plates, code: MA-MG-02002P-C-P • 1 non-return valve pads, code: CO-PV-001 <p>The extraordinary maintenance intervals recommended for this compressor are 4000 hours/4 years.</p>	Extraordinary	4.000h/4y

Contacts:
Werther Air Compressors
 5250 North Sam Houston
 Parkway W. Suite 850
 Houston, TX 77086
 Phone: 832-327-7452
 E-Mail: sales@werther.com
 Web: www.werther.com